


**Dimensions**

**Standard Enclosure - Type NEMA 2, 3R, 4, 4X, 12**

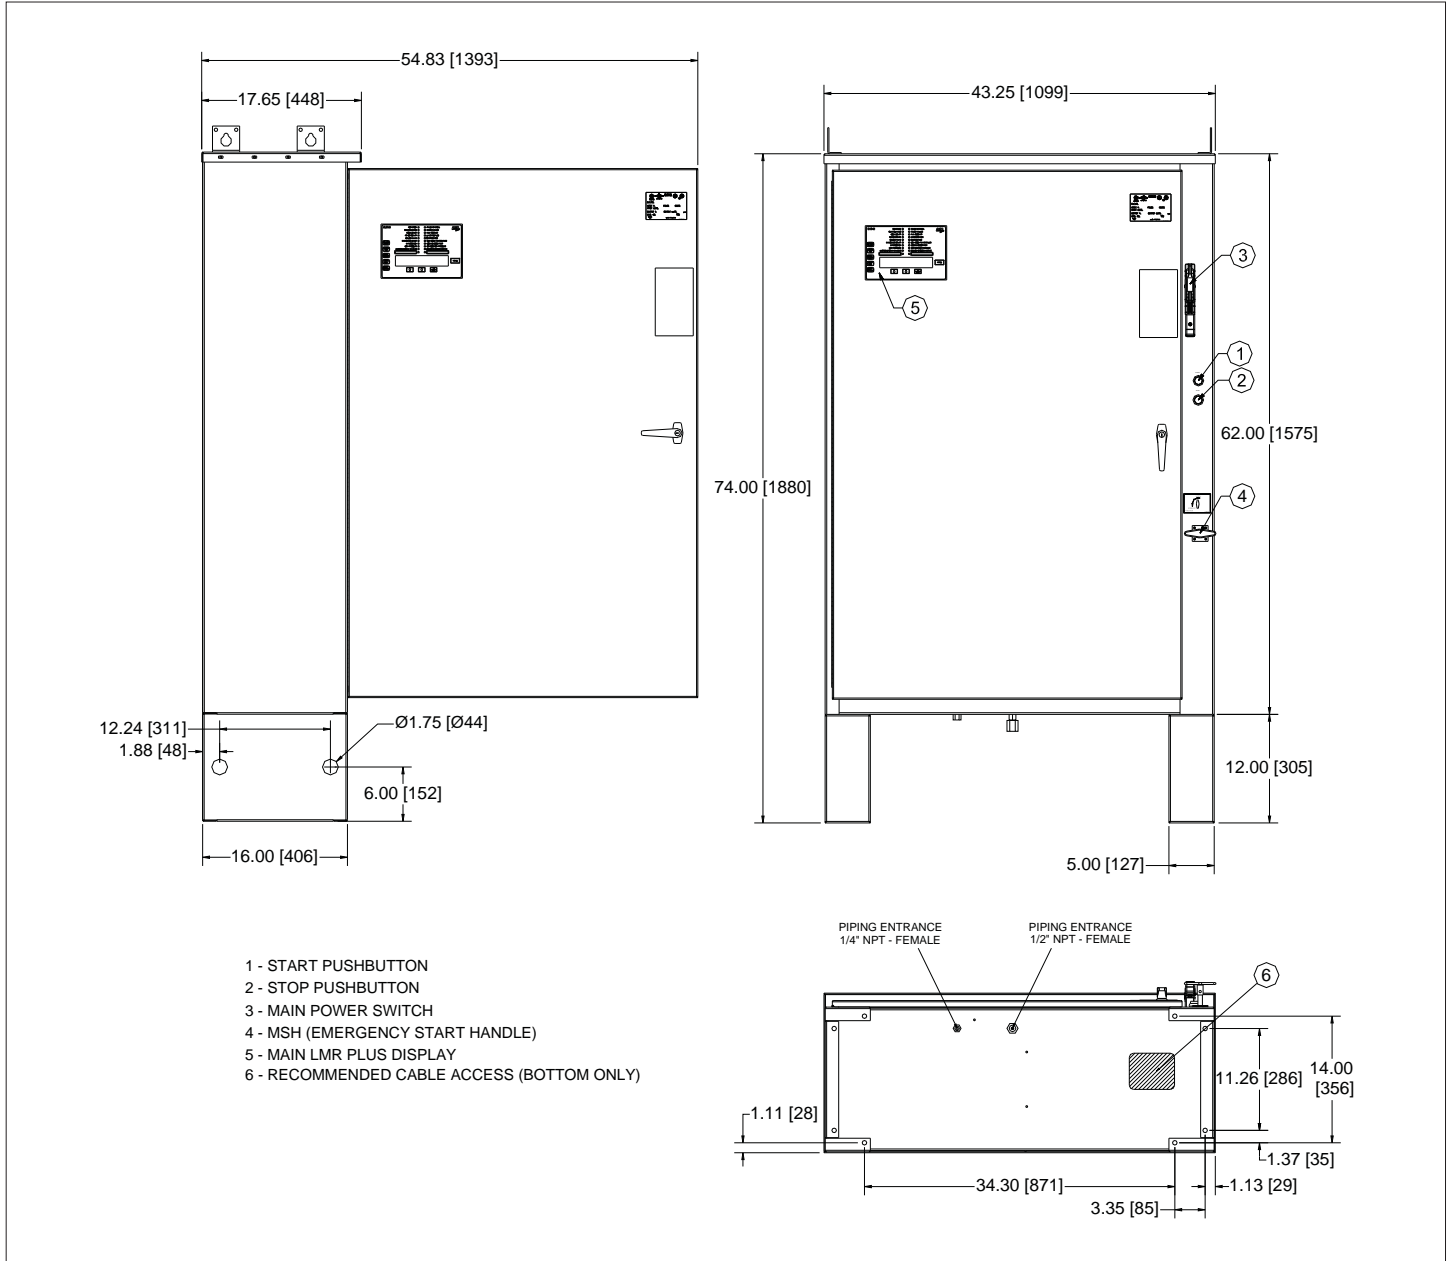

Motor Hp	Line Voltage	Withstand Rating			Approx. Weight Lbs. (Kg)
		Standard	Intermediate	High	
50 - 150	200 - 208V	100,000	Consult Factory	Consult Factory	475 (215)
60 - 200	220 - 240V				
100 - 300	380 - 415V *				
125 - 400	440 - 480V				
125 - 400	550 - 600V	25,000	35,000		

\* Coils available: 380V-50Hz, 380V-60Hz, 415V-50Hz, 415V-60Hz



**NOTES:**

1. All enclosures finished in FirePump red.
2. Cable Entrance bottom only.
3. Standard Enclosure type NEMA 2.