



200
230
240
250
260
270

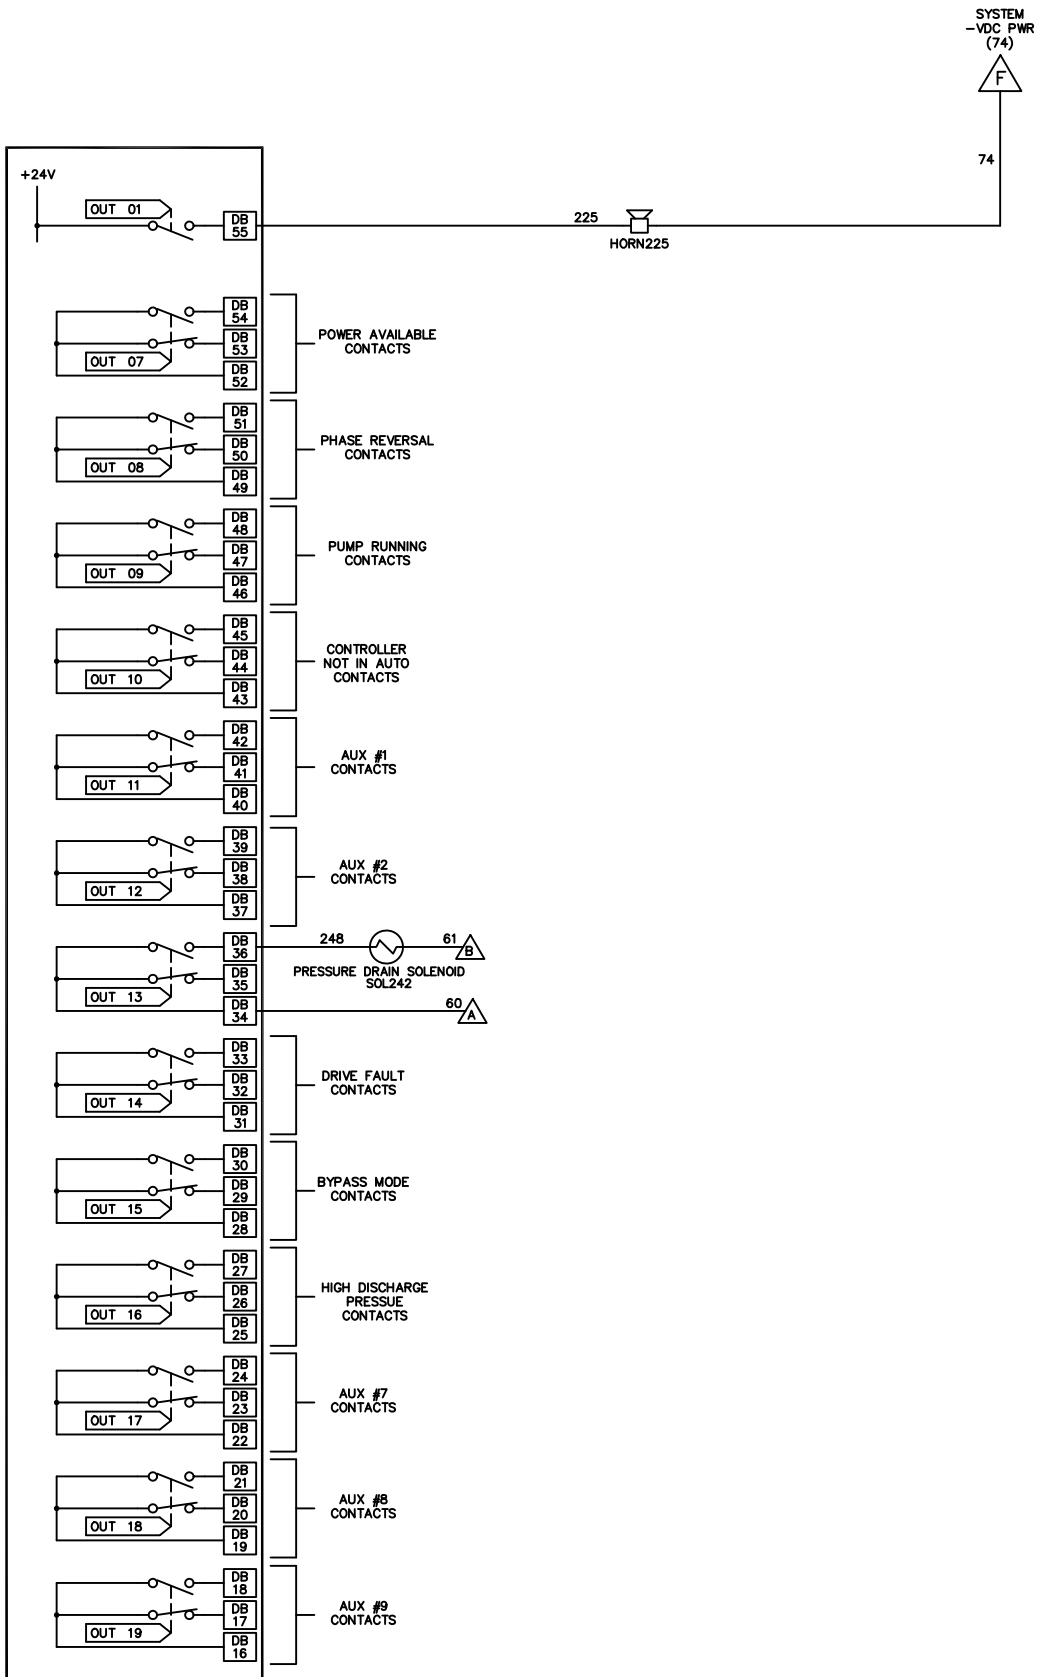

54A SOFT START DOES NOT UTILIZE A COOLING FAN AND ASSOCIATED CONTROL CIRCUIT. COOLING FAN TERMINAL NUMBERS ON SOFT START UNIT WILL VARY WITH MODEL USED.

	DRAWN <i>RL</i>	02-14-06	 METRON, INC. DENVER, CO.
	CHECK		
	APPD <i>MLK</i>	03-24-07	
SCHEMATIC, MODEL MP800 VARIABLE FREQUENCY DRIVE ELECTRIC FPC W/SOFT START BYPASS			OPTIONS: CS34081A
SCALE NTS		SHEET 3 OF 3	