




GERAND ENGINEERING

141 CHESHIRE LANE N, SUITE 100, MINNEAPOLIS MN 55441
952.374.1320 WWW.GERAND.COM

FIRE PUMP TEST METER G-3000-8

CONSTRUCTION & SPECIFICATIONS


- VENTURI:** ZINC PLATED STEEL
- VALVES:** ONE PIECE BRASS BODY
ZINC DIECAST STEEL HANDLE
- ID TAG:** Chain: brass
Tag: Aluminum
- HOSES:** GOODYEAR 3/6" FREON CHARGE HOSES WITH NYTRILE CORE, POLYESTER BRAID AND NYTRILE COVER WITH PVC FOR ABRASION RESISTANCE

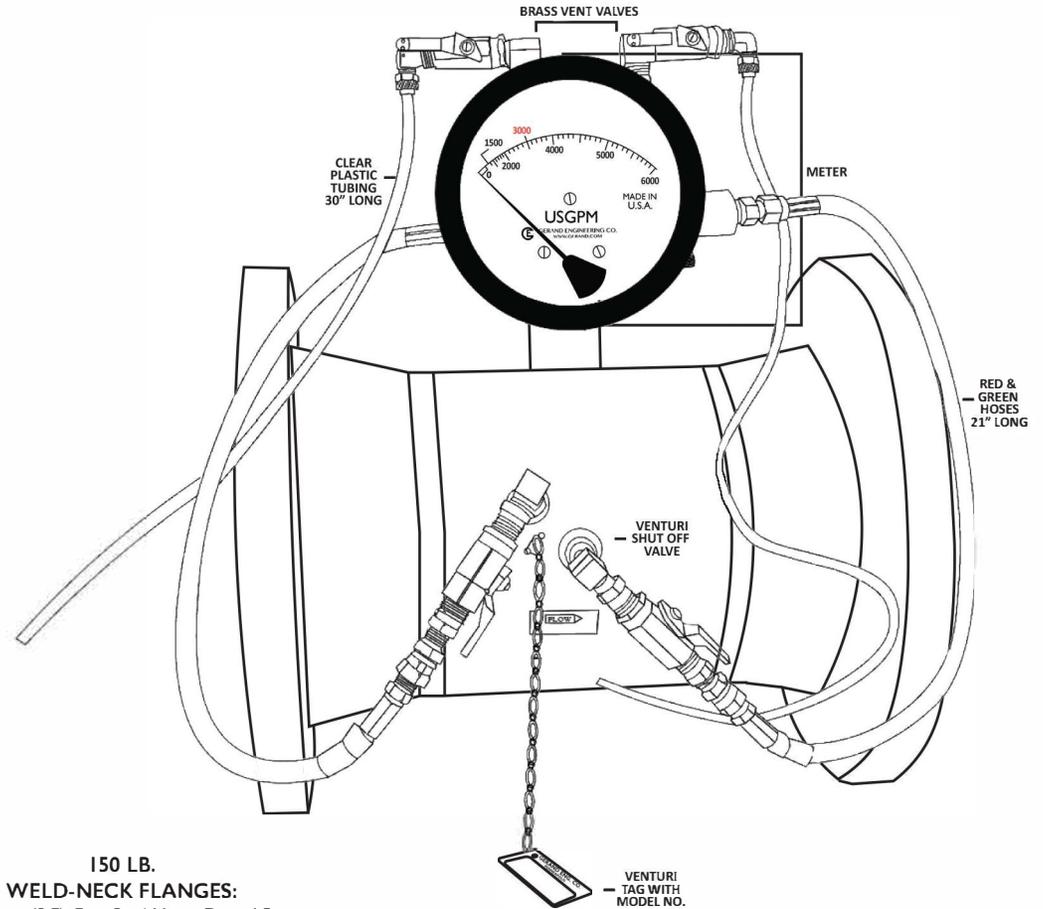

150 LB.

WELD-NECK FLANGES:

- Raised Face (RF): Fire Sea Water Diesel Pumps
- Flat Face (FF): Fire Water Diesel Pumps

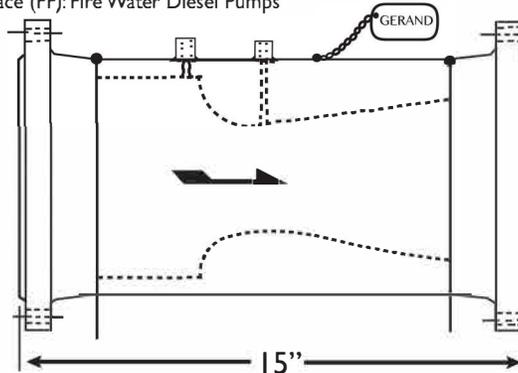

METER DATA

- CONSTRUCTION:** ALUMINUM BODY
- OPERATION:** BUNA "N" DIAPHRAGM
- ACCURACY:** ±2.0%
- TEMPERATURE:** 200° F MAX
- PRESSURE:** 1500 PSI MAX
- APPROX. WEIGHT:** 3 LBS/EACH

4 1/2" DIAL STANDARD - 6" AVAILABLE
**10' REMOTE HOSES AVAILABLE

WEIGHTS & DIMENSIONS

- WEIGHT:** 125 LBS
- SHIPPING DIMENSIONS:** 16" x 16" x 27"
with pallet