


Dimensions

Standard Enclosure - Type NEMA 2, 3R, 4, 4X, 12

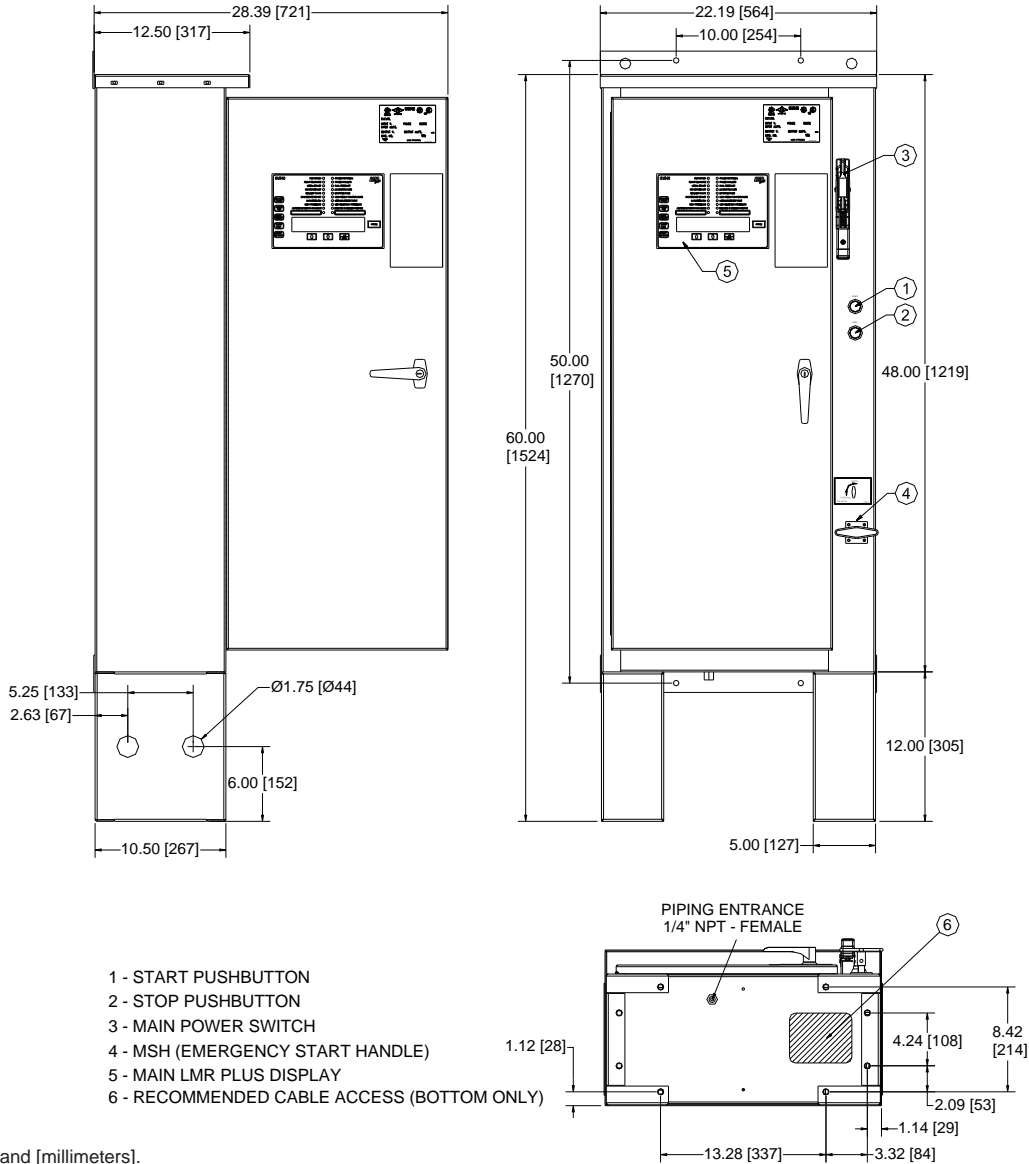

- 1 - START PUSHBUTTON
- 2 - STOP PUSHBUTTON
- 3 - MAIN POWER SWITCH
- 4 - MSH (EMERGENCY START HANDLE)
- 5 - MAIN LMR PLUS DISPLAY
- 6 - RECOMMENDED CABLE ACCESS (BOTTOM ONLY)

Dimensions in inches and [millimeters].

Motor Hp	Line Voltage	Withstand Rating		Approx. Weight Lbs. (Kg)
		Standard	Intermediate	
5 - 30	200 - 208V	25,000	65,000	180 (81)
5 - 30	220 - 240V			
5 - 30	* 380 - 415V			
5 - 30	440 - 480V			
5 - 30	550 - 600V	18,000	25,000	
5 - 15	230V - S/P	10,000	65,000	

* Coils Available: 380V-50Hz, 380V-60Hz, 415V-50Hz, 415V-60Hz

NOTES:

- 1. All enclosures finished in FirePump red.
- 2. Cable Entrance either top or bottom.
- 3. Standard Enclosure type NEMA 2.



N. Y. C.
APPROVED

