


Dimensions

Standard Enclosure - Type NEMA 2, 3R, 4, 4X, 12

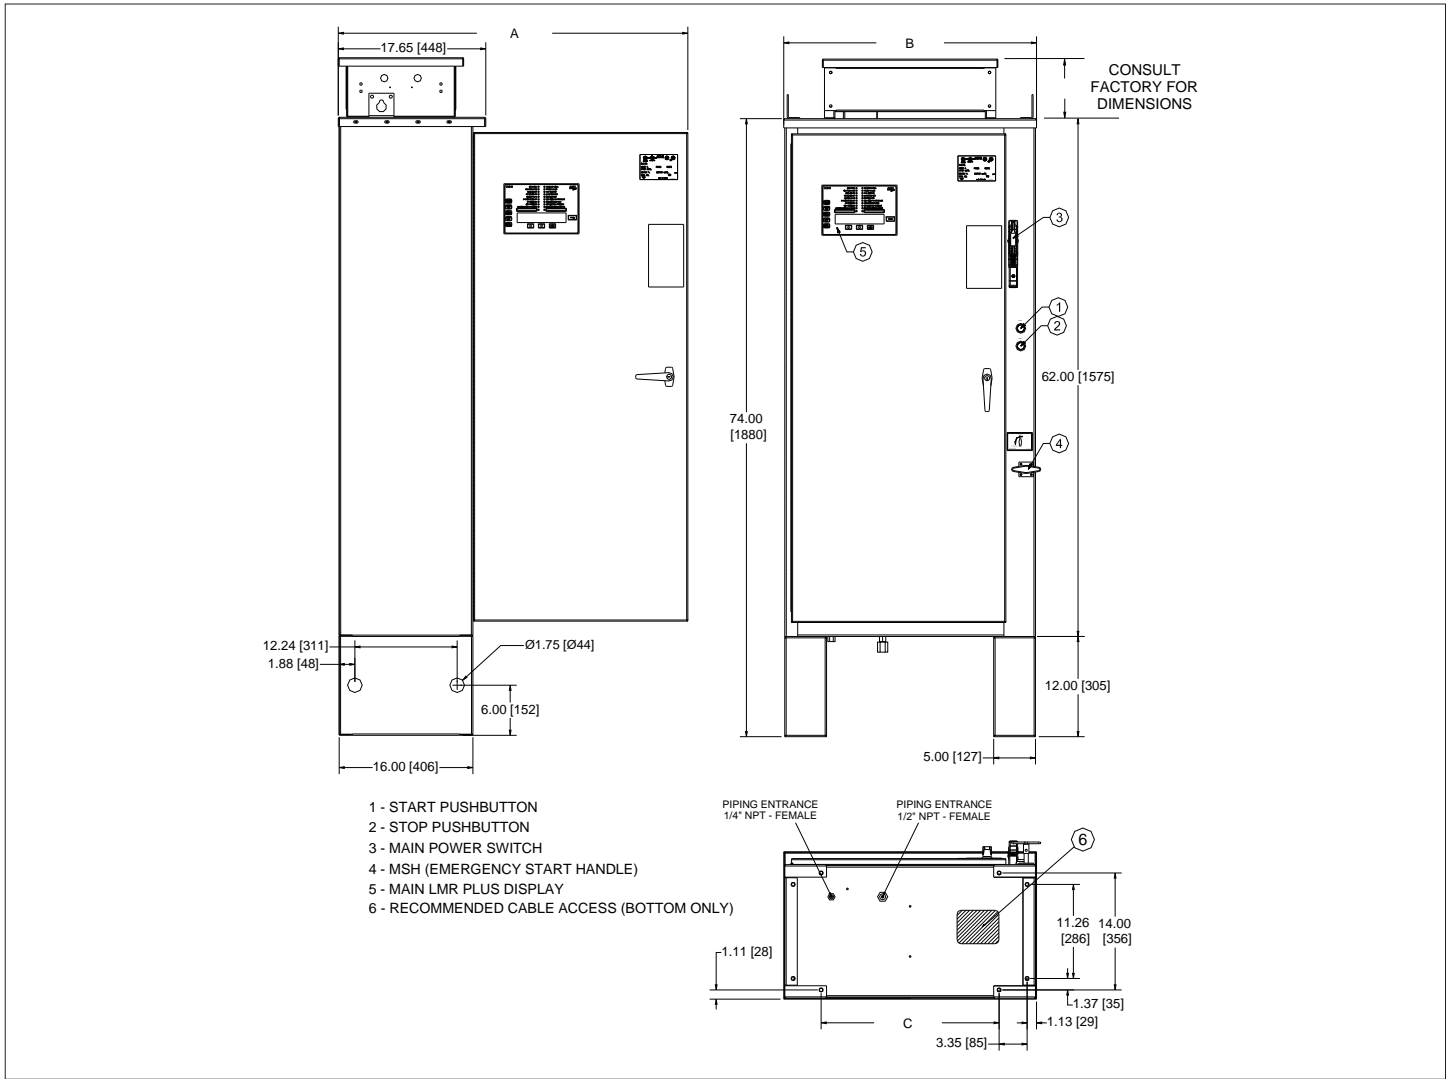

Motor Hp	Line Voltage	Withstand Rating			Approx. Weight Lbs. (Kg)	A	B	C
		Standard	Intermediate	High				
50 - 100	200 - 208V	100,000	Consult Factory	Consult Factory	475 (215)	41.83 (1062)	30.25 (768)	21.30 (541)
60 - 125	220 - 240V							
100 - 200	* 380 - 415V							
125 - 250	440 - 480V							
125 - 300	550 - 600V	25,000	35,000	Consult Factory	590 (267)	54.83 (1393)	43.25 (1099)	34.30 (871)
125 - 150	200 - 208V							
150 - 200	220 - 240V							
250 - 300	* 380 - 415V							
300 - 400	440 - 480V	25,000	35,000	Consult Factory	590 (267)	54.83 (1393)	43.25 (1099)	34.30 (871)
350 - 400	550 - 600V							

* Coils Available: 380V-50Hz, 380V-60Hz, 415V-50Hz, 415V-60Hz



NOTES:

1. All enclosures finished in FirePump red.
2. Cable Entrance bottom only.
3. Standard Enclosure type NEMA 2.