


**Dimensions**

**Standard Enclosure - Type NEMA 2, 3R, 4, 4X, 12**

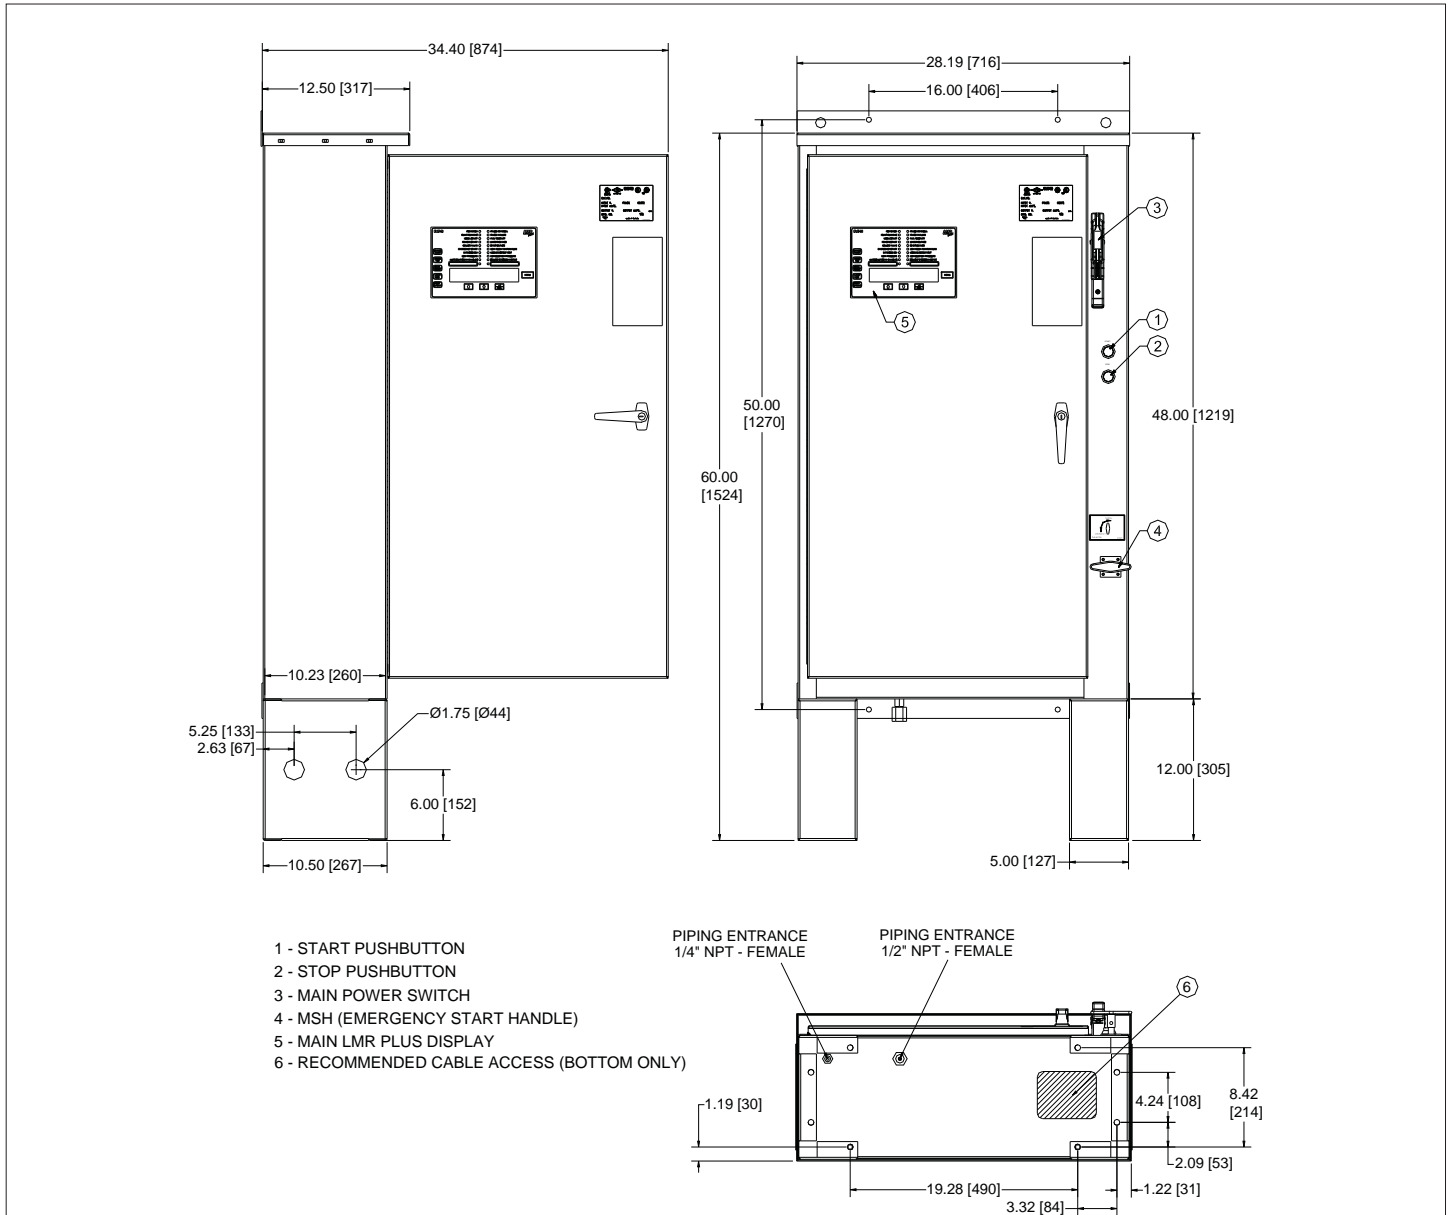

- 1 - START PUSHBUTTON
- 2 - STOP PUSHBUTTON
- 3 - MAIN POWER SWITCH
- 4 - MSH (EMERGENCY START HANDLE)
- 5 - MAIN LMR PLUS DISPLAY
- 6 - RECOMMENDED CABLE ACCESS (BOTTOM ONLY)

Dimensions in inches and [millimeters].

Motor Hp	Line Voltage	Withstand Rating			Approx. Weight Lbs. (Kg)
		Standard	Intermediate	High	
5 - 40	200 - 208V	100,000	150,000	200,000	270 (123)
5 - 50	220 - 240V				
5 - 75	380 - 415V *				
5 - 100	440 - 480V				
5 - 100	550 - 600V	25,000	Consult Factory		

\* Coils Available: 380V-50Hz, 380V-60Hz, 415V-50Hz, 415V-60Hz



**NOTES:**

- 1. All enclosures finished in FirePump red.
- 2. Cable Entrance bottom only.
- 3. Standard Enclosure type NEMA 2.